



# UXP-DF-158



## UXP-DF-158 DATA SHEET 7-16 Din Female Connector for 1 5/8" Cables




Mechanical	Specification	Comment
Pull Force Combined	> 600 lbs   2.67 or cable fails	
Cable/Connector Torsional Torque	50 ft. lbs.   67.8Nm	Cable limited
Interface Durability	50 Cycles	

Electrical	Specification	Comment
Frequency Range	DC to 3 GHz	Cable limited
Impedance	50Ω Nominal	
Average Return Loss (VSWR) DTF	> -40dB 0-1 GHz, > -36dB 1-2 GHz, -32dB 2-2.7	As per Anatel 75
Insertion Loss	< .1√F(GHz)	
3rd Order IMD	-153 dBc minimum, -160 dBc typical	As per IEC 62037-2, -3
Voltage Withstand	> 3.0 kV	
Shielding Effectiveness	< -120dB	0-1 GHz
Insulation Resistance	10GΩ initial, 100MΩ after conditioning	

Environmental	Specification	Comment
Operating Temperature/ Storage Temperature	-40°C to +65°C / -55°C to +85°C	
Interface Moisture	No leakage, mated or unmated > 1.0 Bar	
Corrosion Resistance	1000 Hours	
H.A.L.T.	40 Hours	

General	Specification	Comment
Cable Supported	Andrew AVA7-50, Andrew AL7-50, Andrew LDF7-50, Andrew VXL7-50, RFS LCF158-50, Draka RFA158, Leoni 1-5/8"R, Eupen EC7-50, LS LHF 42D, LS HFC 42D, LS HFAC 42D, Hansen 1-5/8"	
Weight	1.262 lbs.   572.4g	
WPS Weather Protection	WPS-7	
Length	3.100"   78.7mm	
Outer Diameter	2.490"   63.2mm	
Hex Width		

Tools	Specification	Comment
Cable Preparation	SP-158	
Connector Compression	HCG-FRAMESET-158, HCG-CC	
Torque Wrench	Adjustable wrench	

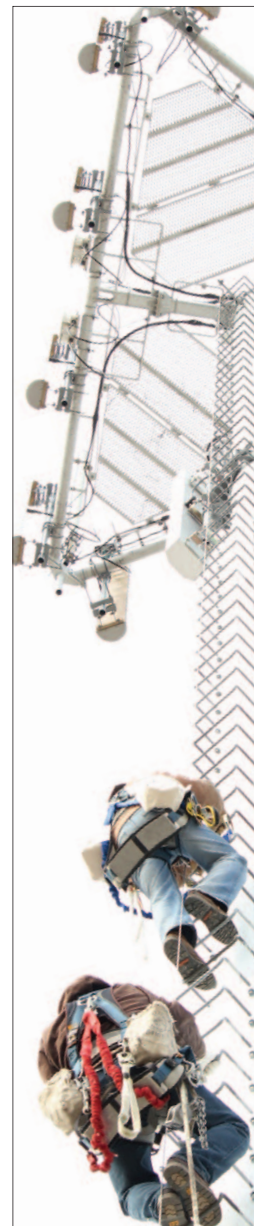

Mobile-enabled:  
ppcqr.com



Scan for more info.